












TLBM/TLB/TLBS

	LARGURA INTERIOR (mm)	LARGURA TOTAL (mm)		MART.	PESO (kg)	POTÊNCIA (cv)	
K5-TLBM-90	940	1040	2	9 	210	15-30	
K5-TLBM-100	1040	1150	2	10 	230	15-30	
K5-TLBM-110	1140	1250	2	11 	240	15-30	
K5-TLB-120	1240	1350	2	12 	250	15-30	
K5-TLB-130	1340	1450	2	13 	270	15-30	
DESCENTRAMENTO HIDRÁULICO							
K5-TLBS-120	1240	1350	2	12 	335	15-30	
K5-TLBS-130	1340	1450	2	13 	355	15-30	
K5-TLBS-140	1440	1550	3	14 	365	25-35	
K5-TLBS-150	1540	1650	3	15 	385	35-60	
K5-TLBS-160	1640	1750	3	16 	395	35-60	

EXTRAS

Patins




TLBS 130




TLBS 120
C/ GRELHA

DESTROÇADOR ligeiro para trituração de restolhos, restos de poda e outros.

- Montagem aos 3 pontos;
- Caixa de engrenagem c/ roda livre 540rpm;
- Transmissão lateral por correias;
- Rotor Ø110mm c/ martelos lisos (furo Ø205mm) - 2200rpm;
- Zona de recorte contra-lâmina;
- Rolamentos oscilantes;
- Rolo nivelador traseiro Ø 110mm;
- Patelas de proteção frontal;
- Cardan.



1

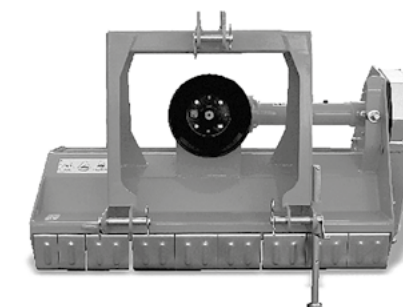

TLBM 110

1. Rotor TLBM, TLB, TLBS (martelos lisos).